




Smijernsgitter - 25 mm

FLEXI-SP225-34/38-2

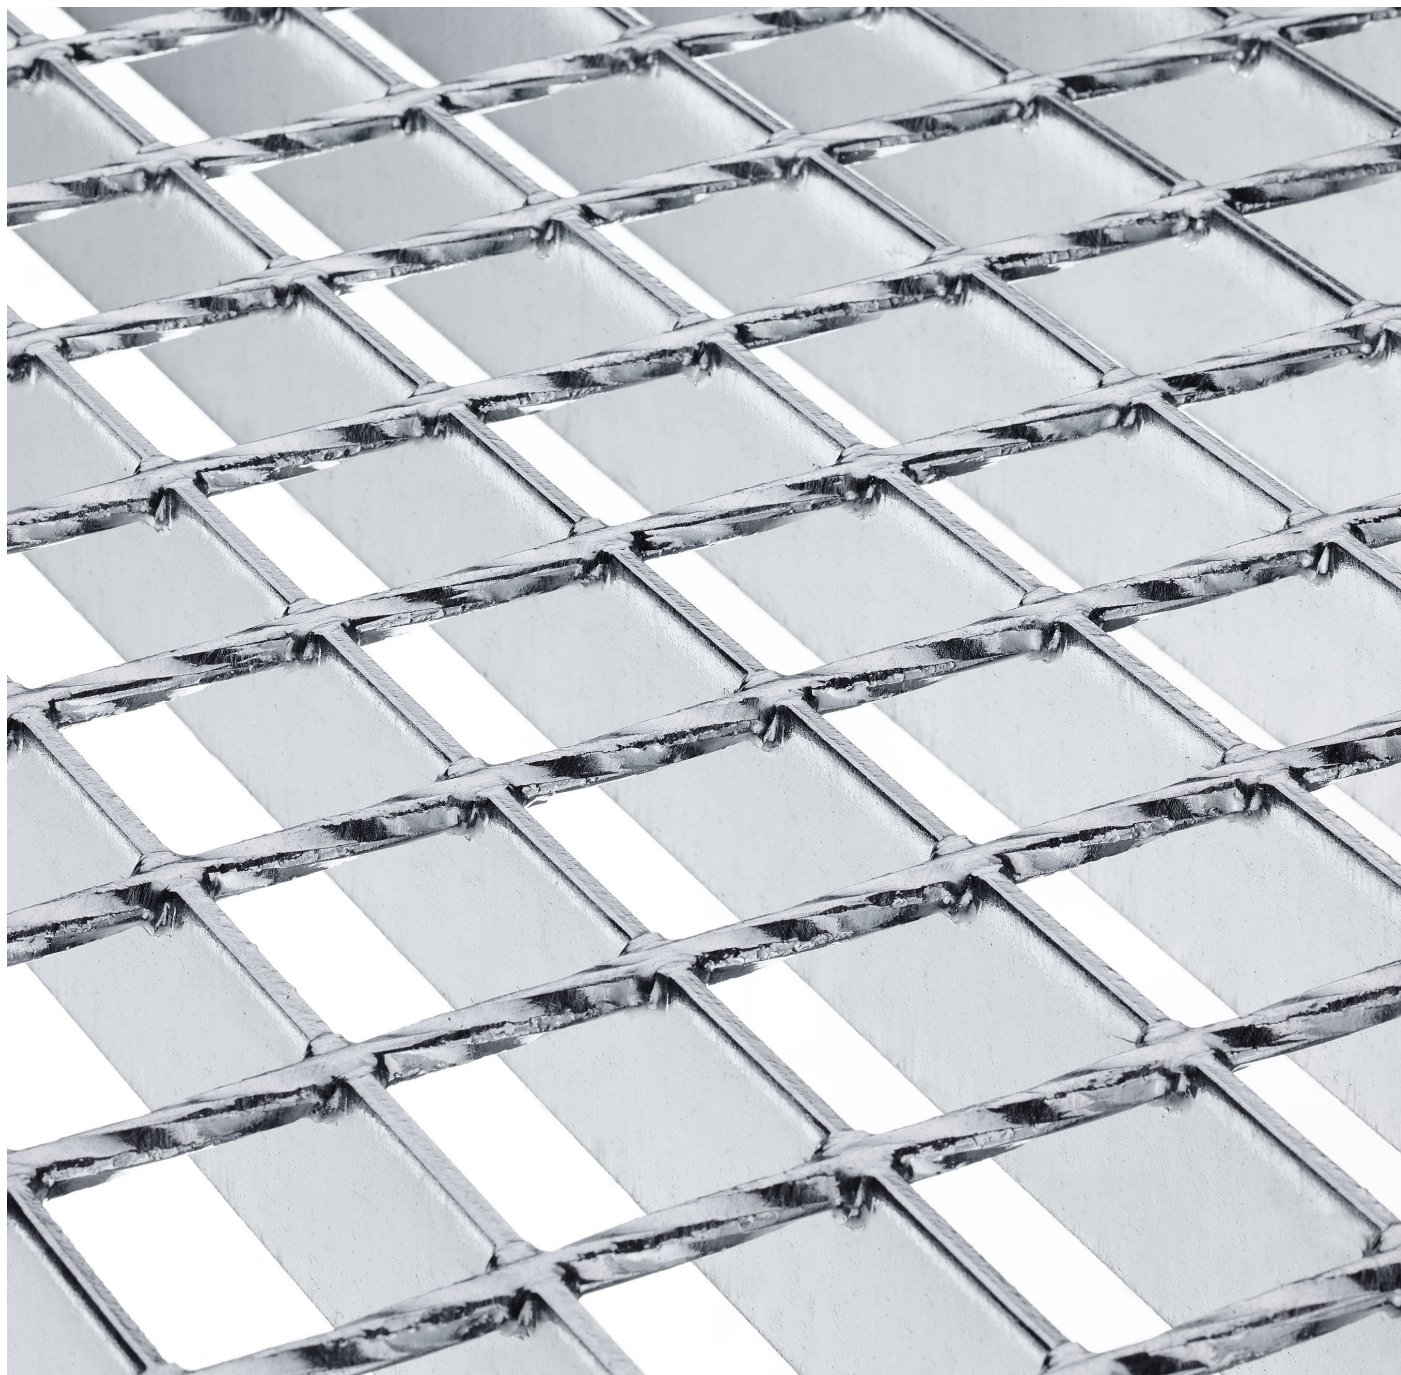

Flexi Riste A/S
Merrildparken 15
DK - 7480 Vildbjerg
(+45) 97 13 32 11
mail@flexiriste.no
www.flexiriste.no

Egenskaper

Materiale S235JR

Overflatebehandling Varmgalvanisert iht. DIN EN ISO 1461

Bærerib høyde 25 mm

Bærerib tykkelse 2 mm

Tværrib tykkelse 4 x 4 mm snojern

Bærerib avstand 34,33 mm

Tværrib avstand 38,1 mm

Belastning iht. EN ISO 14122

Max. fritt spenn 790 mm

Konsentrert belastning 1,5 kN

Trykflate 200 x 200 mm

Nedbøyning 3,41 mm

Fordelt belastning 5 kN/m²

Nedbøyning 1,59 mm

Vekt 19,1 kg/m²

